



The World's First Ultra-Long-Range Digital LiDAR

EM4 is the flagship product of RoboSense's brand-new digital architecture EM Platform. It integrates multiple advanced technologies, including digital architecture, crosstalk removal, all-condition optoelectronic signal processing, and lossless data compression. EM4 Gen1 features 520 lines, a maximum detection range of 300m, and an imaging capability of 12.48million points/sec-top-tier performance that leads LiDAR into the digital era.

Product Advantages



Ultra-High
Beam Count



Ultra-Long
Detection Range



High
Resolution



All-Condition
Adaptability




SPAD-SoC
Chip



VCSEL Chip

RoboSense / Suteng Innovation Technology Co., Ltd.

RoboSense Global Headquarters - Building 9, Block 2, Zhongguan Honghualing Industry Southern District, 1213 Liuxian Avenue, Taoyuan Street, Nanshan District, Shenzhen, China / 0755-86325830 / service@robosense.cn




Product Specifications

Lines	520	Points per second (Dual return mode)	12,480,000 pts/s
Laser Wavelength	905nm	Ethernet Connection	1000M Base T1
Laser Safety	Class 1 Eye Safety	Output	UDP packets over Ethernet
Range	300m(250m@10% NIST)	UDP Packet content	Distance, Angular coordinates, Intensity, Timestamp, etc.
Blind Spot	≤1m	Operating Voltage	9V - 16V
Range Precision (Typical)	5cm (1sigma)	Power Consumption	16W
Horizontal FOV	120°	Operating Temperature	-40°C ~ +85°C
Vertical FOV	≥25°	Storage Temperature	-40°C ~ +105°C
Horizontal Resolution	≤ 0.1°	Weight(Without Cables)	~930g±5%
Vertical Resolution	0.05°	Dimensions	110mm (D) x 140mm (W) x45mm (H)
Frame Rate	10Hz	Time Synchronization	gPTP
Points per second (Single return mode)	6,240,000 pts/s	Ingress Protection	IP67、IP6K9K


Deployment Recommendations

EM4, paired with 4 to 6 E1 solid-state blind-spot LiDARs, is highly favored in Robotaxi, Robotruck, Robobus and other scenarios.

• EM4×4 + • E1×6

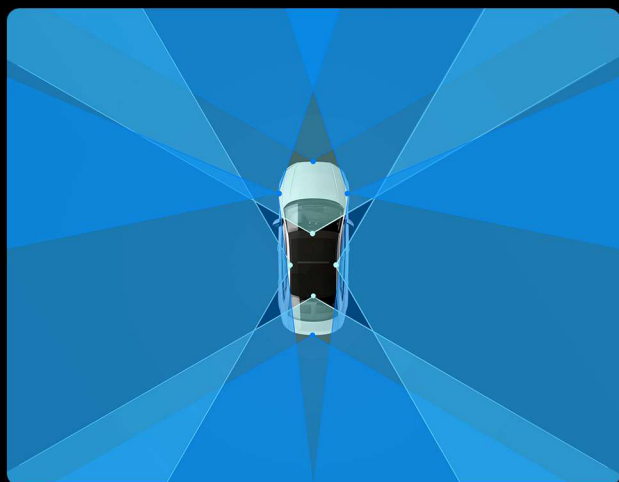

• EM4×4 + • E1×4

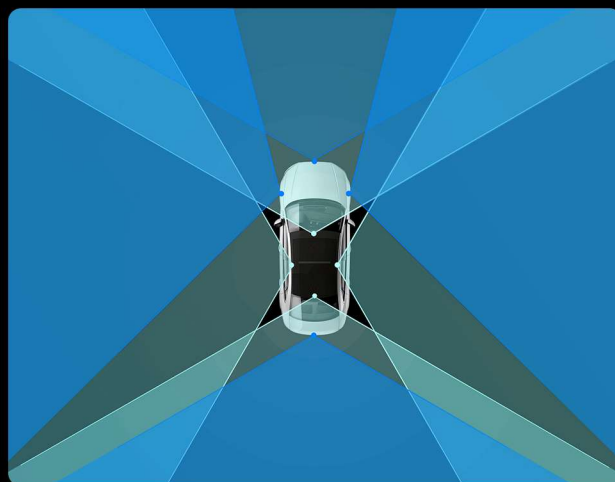

RoboSense / Suteng Innovation Technology Co., Ltd.

RoboSense Global Headquarters - Building 9, Block 2, Zhongguan Honghualing Industry Southern District, 1213 Liuxian Avenue, Taoyuan Street, Nanshan District, Shenzhen, China / 0755-86325830 / service@robosense.cn



販売代理店：株式会社ハイテック
〒164-0012 東京都中野区本町4-44-18ヒューリック中野ビル6F
TEL：03-3229-7351
E-mail：contact@high-tech.co.jp

www.robosense.ai